


HAULER® PRO-X

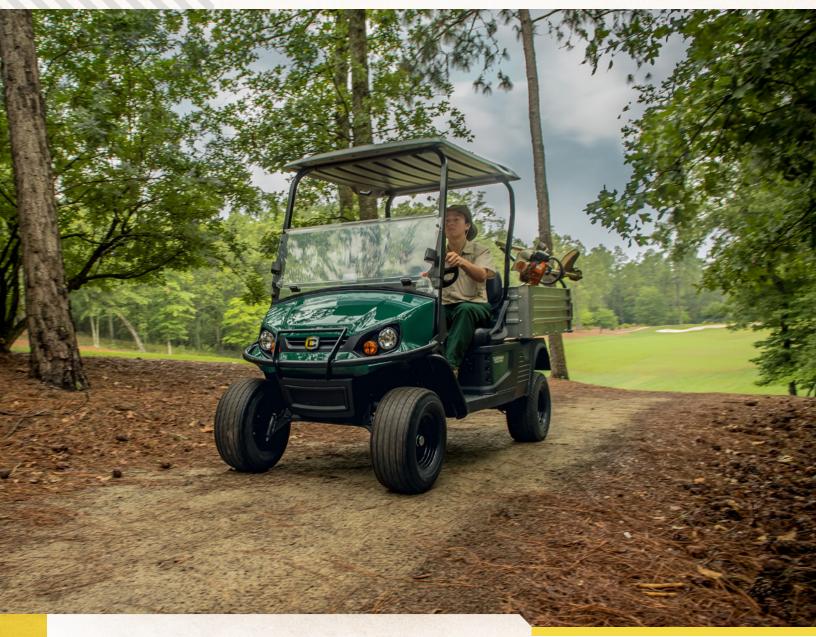

GET MORE MILEAGE OUT OF EVERY WORK DAY.

Stand back and let the Hauler PRO-X raise your expectations on what a 72-volt AC powertrain can do. With its 50-mile range, silent operation and lifted suspension, the Hauler PRO-X will help you work seamlessly without disrupting work or play. Outstanding energy efficiency, low operational costs and a dash that easily accommodates everything from radios, clipboards, oversized beverage containers and more, the Hauler PRO-X is equipped for action. So load up and let's work!

LET'S WORK.®

72V AC ELECTRIC **1200**LB

TOW CAPACITY

12 CU FT CARGO BED 900LB

LOAD CAPACITY





CUSHMAN HAULER® PRO-X









OPTIONS & ACCESSORIES

- Limited Slip Differential 4-Wheel Mechanical Brakes
- 4-Wheel Hydraulic Brakes
- Locking Glove Box
- Glove Box Mat
- Floor Mount Attachment
- Windshield
- Canopy
- Power Dump
- Long Handled Tool Holders
- Radio Holder
- Interior Tool Hook
- LED Headlights Hi/Low
- Taillights

- Brakelights
- Hubcaps
- Comfort Grip Steering Wheel
- Fuel Gauge
 Battery Fill System · Rearview Mirror
- 12-volt Outlet
- USB Port
- Unique Key Switch Hour Meter
- Weather Enclosure • Cab
- Ball Cage
- ROPS

BODY & CHASSIS	
RAME	Welded Steel with E-Shield™ e-coat plus DuraShield™ Powder Coat
ODY & FINISH	Injection Molded TPO, Painted
TANDARD COLOR	Patriot Blue, Forest Green
DIMENSIONS	
VERALL LENGTH	119 in (302.26 cm)
VERALL WIDTH	49.4 in (125.48 cm)
VERALL HEIGHT W/CANOPY	77 in (196 cm)
VHEEL BASE	77.5 in (196.9 cm)
RONT WHEEL TRACK	38.0 in (96.56 cm)
EAR WHEEL TRACK	38.5 in (97.79 cm)
ROUND CLEARANCE	7.2 in (18.29 cm)
ARGO BOX CAPACITY	12 cu ft (0.340 m³)
POWER	
OWER SOURCE	72-Volts
10TOR TYPE	AC Induction
IORSEPOWER (KW)	22.4HP (16.7 kW) - Measured at Peak Torque
LECTRICAL SYSTEM	72 Volt
ATTERY (QTY/TYPE)	Nine 8-Volt Deep Cycle
ATTERY CHARGER	900 Watt 72V DC
EY OR PEDAL START	Pedal
RIVETRAIN	Motor Shaft Direct Drive
RANSAXLE	Differential with Helical Gears
PEED CONTROLLER	350 Amp AC
EAR SELECTION	Forward-Neutral-Reverse
EAR AXLE RATIO	17:1
PERFORMANCE	
EATING CAPACITY	2 Person
URB WEIGHT	1513 lb (686 kg)
ED LOAD CAPACITY	500 lb (227 kg)
EHICLE LOAD CAPACITY	900 lb (408 kg)
PEED	16.5 mph +/- 0.5 mph (26.6 kph +/- 0.8 kph)
OWING CAPACITY	1200 lb (544 kg) max
UTSIDE CLEARANCE CIRCLE	23.5 ft (7.16 m)
STEERING & SUSPE	
TEERING	Self-Compensating Rack and Pinion
RONT/REAR SUSPENSION	Leaf Springs w/ Hydraulic Shock Absorbers
ERVICE BRAKE	Rear Wheel Mechanical Self-adjusting Drum
ARKING BRAKE	Self-compensating, Single Point Engagement
	The standard of the standard o

www.cushman.com