

ONWARD LSV (2+2)

Club Car®

THE CONFIDENT CHOICE

Why Club Car:

- Engineered for longevity with purpose-built components designed to outlast daily wear
- Rust-proof aluminum chassis that resists corrosion and stands up to heat, moisture, and time
- Proven performance heritage, refined through millions of rounds and rides worldwide
- Manufactured in Augusta, Georgia, backed by decades of craftsmanship and quality control

TRUE WARRANTY COVERAGE!

Parts AND Labor Coverage unlike some import brands with no labor coverage and poor replacement parts availability!




Available
Powertrains



STANDARD MODELS

NON-LIFTED

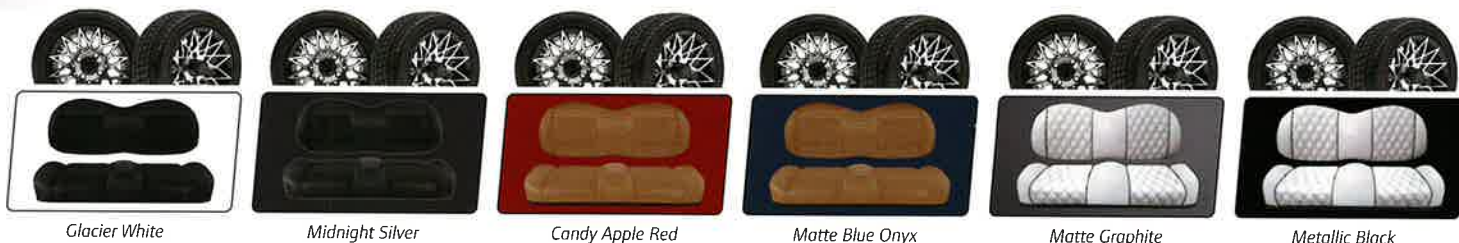

Glacier White

Midnight Silver

Candy Apple Red

Matte Blue Onyx

Matte Graphite

Metallic Black

LIFTED



Glacier White

Midnight Silver

Candy Apple Red

Matte Blue Onyx

Matte Graphite

Metallic Black

STANDARD EQUIPMENT ON ALL MODELS

- Premium Seats
- Canopy and DOT Windshield
- Comfort Grip Premium Steering Wheel
- Lockable Upper Dash Glove Box
- Lockable Side Glove Box Compartments
- Digital Display
- Dual Wireless Chargers

PREMIUM MODELS INCLUDE

Exclusive Colors!

ALL Standard Equipment PLUS:

- Premium Soundbar
- Premium Wheel & Tire
- NEW! Premium Floormat
- NEW! Dash Pocket Lights





Top Speed
25 MPH



Backup
Camera



PEDESTRIAN
ALERT SYSTEM
(Acoustic Vehicle
Alarming System)



4-Wheel
Brakes



Seatbelts



Occupant
Protection
System

4 PASSENGER ONWARD HP LI-ION LSV

DIMENSIONS

	Non-Lifted	Lifted
Overall Length	108 inches	114 inches
Overall Width	48.75 inches	49.5 inches
Topped Height	76 inches	81 inches
Untopped Height	49.75 inches	54.5 inches
Wheelbase	65.5 inches	67.5 inches
Front Wheel Track	35.75 inches	40.75 inches
Rear Wheel Track	40 inches	40 inches
Ground Clearance	4.5 inches	6.4 inches

POWER

Power Source	Lithium AC
Motor Type	3.5kW AC motor
Horsepower	4.7 hp
Batteries	4.0 kWh (Base Lithium models) or 7.0 kWh (Lithium XR models)
Battery Charger	650W AC Delta Q
Speed Controller	375 Amp AC
Drivetrain	Motor Shaft Direct Drive
Gear Selection	Dash Mounted FNR
Rear Axle Ratio	14.85:1

PERFORMANCE

Seating Capacity	4	
Curb Weight	954 lb - Base Lithium/997 lb - XR	1006 lb - Base Lithium/1057 lb - XR
Vehicle Load Capacity	800 lb	
Turning Radius	111 inches	116 inches
High Speed (Level Ground)	25 mph	

STEERING & SUSPENSION

Steering	SportDrive™ — Self-compensating double reduction helical rack & pinion
Suspension (Front & Rear)	Front: Independent A-arms with hydraulic shocks Rear: Patent pending w/ track bar and automotive jounce bumpers
Brakes	Front wheel hydraulic disc brakes & self-adjusting, rear wheel mechanical drum
Parking Brake	Electronic Park Brake System

BODY & CHASSIS

Frame	AlumiCore™ — Ladder-style aluminum box beam
Body and Finish	Automotive grade paint and UV protected molding