


HAULER® PRO

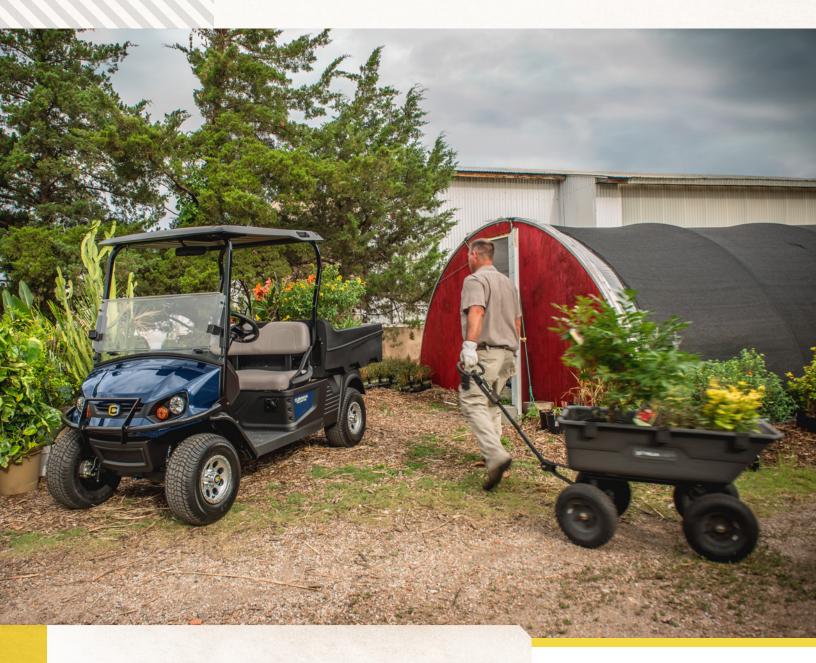

NO JOB OUT OF RANGE. NO TASK OFF LIMITS.

With its remarkable 50-mile range and quiet 72-volt AC powertrain, the Hauler PRO has the stamina few gas vehicles can match. Standard features include an on-board charger, rear hitch receiver, and premium turf tires. From its impressive energy efficiency to low operational cost, the Hauler PRO will help you go farther and accomplish more. Go PRO and get the performance you deserve.

LET'S WORK.®

72V

AC ELECTRIC

50 MILES PER BATTERY CHARGE

1500LB

CAPACITY

1200LB LOAD CAPACITY






CUSHMAN HAULER® PRO









OPTIONS & ACCESSORIES

- Bed Dividers
- Long-Handled Tool Holder
- Cargo Mesh Netting
- L-Track Aluminum Bed System
- Weather Enclosure
- USB Outlet
- 12-Volt Outlet
- Canopy Storage Net
- Brush Guard
- Rearview Mirror • ROPS-Certified Cab
- Ladder/Hoop Rack
 - Brake Lights
 - Tail Lights
 - E-Shield™ Frame
 - Fuel/Oil Gauge
 - Premium Steering Wheel
 - Side Body Color
 - Windshield • LED Headlights
 - Glove Box
 - Floor Mount Attachment

BODY & CHRSSIS	
FRAME	Welded Steel with DuraShield™ Powder Coat
BODY & FINISH	Injection Molded TPO
STANDARD COLOR	Patriot Blue, Forest Green
DIMENSIONS	
OVERALL LENGTH	115 in (292.1 cm)
OVERALL WIDTH	49.4 in (125.5 cm)
OVERALL HEIGHT W/CANOPY	70.5 in (179.1 cm)
WHEEL BASE	76 in (193 cm)
FRONT WHEEL TRACK	35 in (88.9 cm)
REAR WHEEL TRACK	38.5 in (97.8 cm)
GROUND CLEARANCE	4.5 in (11.4 cm)
CARGO BOX CAPACITY	12 cu ft (0.34 m³)
POWER	
POWER SOURCE	72-Volts
MOTOR TYPE	AC Induction
HORSEPOWER (KW)	22.4HP (16.7 kW) - Measured at Peak Torque
ELECTRICAL SYSTEM	72 Volt
BATTERY (QTY/TYPE)	Nine 8-Volt Deep Cycle
BATTERY CHARGER	900 Watt 72V DC
KEY OR PEDAL START	Pedal
DRIVETRAIN	Motor Shaft Direct Drive
TRANSAXLE	Differential with Helical Gears
SPEED CONTROLLER	350 Amp AC
GEAR SELECTION	Forward-Neutral-Reverse
REAR AXLE RATIO	17:1
PERFORMANCE	
SEATING CAPACITY	2 Person
CURB WEIGHT	1475 lb (669 kg)
BED LOAD CAPACITY	800 lb (363 kg)
VEHICLE LOAD CAPACITY	1200 lb (544 kg)
SPEED	14.5 mph ± .05 mph (23.3 kph ± 0.8 kph)
PROGRAMMABLE SPEED RANGE	5-19 mph (8-30.5 kph)
TOWING CAPACITY	1500 lb (680 kg) max
OUTSIDE CLEARANCE CIRCLE	21.5 ft (6.6 m)
STEERING & SUSPEI	NSION
STEERING	Self-Compensating Rack and Pinion
FRONT/REAR SUSPENSION	Leaf Springs w/ Hydraulic Shock Absorbers
SERVICE BRAKE	Rear Wheel Mechanical Self-adjusting Drum
PARKING BRAKE	Self-compensating, Single Point Engagement
FRONT/REAR TIRES	18 x 8.5-8

www.cushman.com